


Environmentally-Friendly

The DocuPrint C2255 is a Fuji Xerox product manufactured using our trend-setting “Biomass-Plastic”. The Biomass-Plastic contains a specified minimum quantity of organic resources like plants. And in this case, the organic resource is corn. In addition, these features and practices can be found in the DocuPrint C2255:

- Energy-saving sleep mode of 3W or less
- Lead-free and halogen-free construction
- International Energy Star certified
- Reduced CO₂ emissions of up to 35% in the manufacturing of EA-HG Toner
- Reduced CO₂ emissions of up to 16% in the manufacturing of Biomass-Plastic

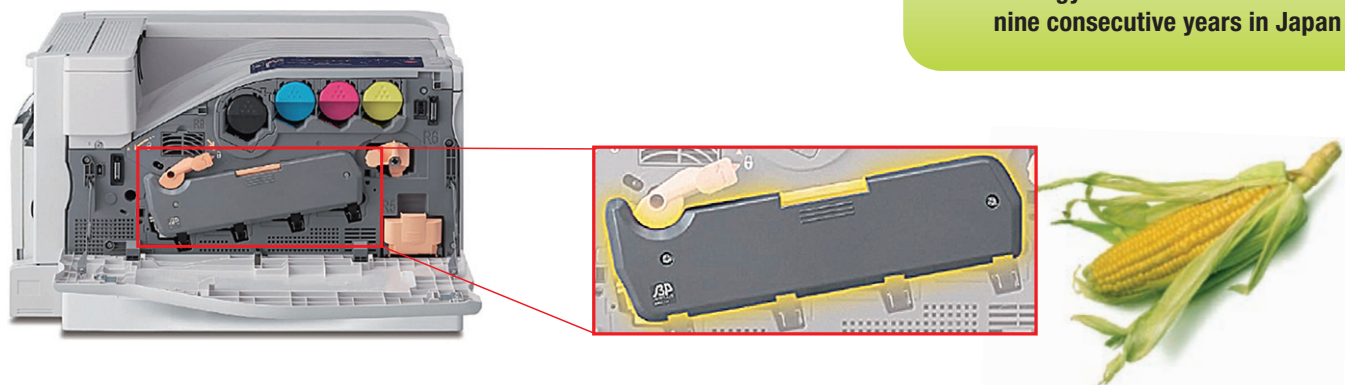

4th Eco-Product Awards

DocuPrint C2250
(the Japanese version of DocuPrint C2255)
won the 4th Eco-Products Awards in 2007

The Minister of Economy, Trade and Industry (METI) Prize in the Eco-Products Category

Energy Conservation Prize

Fuji Xerox wins the
Energy Conservation Prize for
nine consecutive years in Japan

Configurations
To Suit You



660
sheets

DocuPrint C2255
Standard Configuration
(560-sheet cassette and
100-sheet bypass tray)*

1,220
sheets

Standard Configuration
+
Single Tray Module
(560-sheet cassette and
100-sheet bypass tray +
560-sheet tray)*

1,220
sheets

Standard Configuration
+
Single Tray Module
+
Cabinet
(560-sheet cassette and
100-sheet bypass tray +
560-sheet tray + Cabinet)*

2,340
sheets

Standard Configuration
+
3 Tray Module
(560-sheet cassette and
100-sheet bypass tray +
560-sheet tray x 3)*

* 64gsm Fuji Xerox paper

FUJI xerox



DocuPrint C2255
A3 Colour Page Printer

FUJI xerox



DocuPrint C2255
A3 Colour Page Printer

Consumables	
Black (up to 15,000 pages ¹)	CT201160
Cyan (up to 12,000 pages ¹)	CT201161
Magenta (up to 12,000 pages ¹)	CT201162
Yellow (up to 12,000 pages ¹)	CT201163
Additional Supplies	
Drum Cartridge*	CT350654
(up to 40,000 pages ¹)	
Waste Toner Bottle	CWAA0742
Periodic Replacement Item	
Fuser Unit 220V (up to 100K pages ²)	EL300708
Fuser Unit 110V (up to 100K pages ²)	EL300709
Accessories / Options	
Single Tray Module (560 sheets x 1 Feeder Unit)	EL300697
3 Tray Module (560 sheets x 3 Feeder Unit)	EL300696
Duplex Unit	EL300698
Cabinet	EL300699
Castor Base	EL300700
Parallel Port (Mini Centronics)	EL300703
36pin Amphenol connector x 1)	
Hard Disk Unit (40GB or larger)	EL300704
Feature Enhance Kit	EL300701
TC / SC Font ROM ³	EL300710
Korea Font ROM ³	EL300711

Additional Memory	
256MB Memory	EL300705
512MB Memory	EL300706
1,024MB Memory	EL300707

- * A set of 4 drums is required to print CMYK colour.
- ¹ Yield is in accordance with ISO / IEC 19798; Actual yields vary considerably based on print coverage and other factor.
- ² Declare yield based on an average job size of 3 pages letter / A4-size. Yield will vary based on job run length, media size, media type and orientations.
- ³ Cannot be installed simultaneously with "Feature Enhance Kit".

For more information or for your nearest authorised Fuji Xerox Printers reseller, visit our website or call:

Australia
1300 793 769
New Zealand
0800 993 769
China
(86) 010 6588 6633
Hong Kong
(852) 2 513 2646
Korea
(82) 2 528 5807
Malaysia
(60) 3 757 8877
Singapore (ASEAN Headquarters)
(65) 6 351 0118
Taiwan
(886) 8788 1758
Thailand
(66) 2 617 6700
Vietnam
(84) 8 829 0038

www.fxprinters.com



Copyright © 2007 Xerox Corporation. All rights reserved. Contents of this publication may not be reproduced in any form without permission of Xerox Corporation. XEROX®, Phaser®, CentreWare® and Scan to PC Desktop® are registered trademarks of Xerox Corporation in the U.S. and / or other countries. Total Satisfaction Services is a service mark of Xerox Corporation. ScanSoft®, OmniPage® and PaperPort® are registered trademarks of ScanSoft, Inc. All other trademarks are the property of their respective manufacturers. As an ENERGY STAR partner, Xerox Corporation has determined that this product meets the ENERGY STAR guidelines for efficiency. The ENERGY STAR name and logo are registered U.S. trademarks. The information in this brochure is subject to change without notice. 03 / 08 610P728500A 328R-01UB

CONFIGURATIONS			
Performance		A4 Colour and Mono	A3 Colour and Mono
Print Speed	Simplex	Up to 25ppm	Up to 14ppm
	Duplex	Up to 20ppm	Up to 9ppm
First-page-out Time		Colour: <8.3 seconds; Black & White: <6.3 seconds	
Warm-up Time		<30 seconds	
Memory (std / max)		256MB / 1.5GB (512MB + 1GB)	
Processor		667MHz	
PDL (Printer Description Languages)		PCL XL, PCL5c, FX-PDF, XPS, HPGL, HPGL2 and PostScript® 3™, TIFF, ESC / P-K	
Internal Hard Drive (optional)		40GB	
Output Resolution		600 x 600dpi; 1,200 x 1,200dpi; 1,200 x 2,400dpi	
Connectivity		USB 2.0 x 2 ports (Type B), 10 / 100BaseTX Ethernet, EP-A ¹ , Parallel Port (optional)	
Interface			
Paper Handling			
Paper Input* Capability		Tray 1: 560 sheets, Custom sizes: 140 x 182mm – 297 x 432mm;	
		Single Tray Module: 560 sheets x 1 Feeder Unit, Custom sizes: 140 x 182mm – 320 x 457mm;	
		3 Tray Module: 560 sheets x 3 Feeder Unit, Custom sizes: 140 x 182mm – 297 x 432mm;	
		Duplex Unit: 1 sheet, Custom sizes: 128 x 140mm – 320 x 457mm;	
		Bypass Tray: 100 sheets, Custom sizes: 89 x 98mm – 320 x 483mm, Banner size: 320 x 1,200mm	
Paper Output* Capability		400 sheets (A4) / 200 sheets (A3), Face down	
Warranty		1 Year on-site warranty	

¹ PostScript™ version 3017.104 ² Post launch ³ Based on 64gsm Plain Paper
Note: Extend machine life up to 1,500k print volume requires periodical maintenance kits (200k and 480k yields) replacement at customer's expense

SPECIFICATIONS

Network / Software

Printer Management CentreWare® Internet Services, ApeosWare Easy Admin 1.0.6 or later (optional)

Printer Drivers Windows® 2000 / XP (32 / 64-bit) / Vista (32 / 64-bit) / Server® 2003 (32 / 64-bit) / Mac OS 8.6-9.2.2 / OS X (10.3.9-10.4.10), Linux® Red Hat® 8.0-9.0, NetWare® 3.X, 4.X, 5.X, 6, 6.5*, SUSE® 9.0, Citrix® Presentation Server™, SAP® R / 3®

* Netware® 6.5 requires applying support pack 1.1 or later provided by Novell®

Operating

Dimensions 640 x 665 x 399mm (W x D x H)

Weight 63kg

Environment Temperature: Running: 5°C – 32°C, Standby: 20°C – 40°C; Humidity: Running: 15% – 85% RH*, Standby: 5% – 85% RH*; Altitude: 0 – 2,500m

Noise Levels Running: 54.5dB (A), Standby: 25.5dB (A)

Electrical Power: 220VAC – 240VAC, 50 / 60Hz (AP / Korea / China); 100VAC – 127VAC, 50 / 60Hz (Taiwan); Power Consumption: Running: 1,450W, Standby: 100W, Power Saver Mode: 3W

* No dew condensation

Media Support

Standard Tray A3, A4, A5, B4, B5, Letter, Legal 13/14, 140 x 182mm – 297 x 432mm

Light Weight: 60gsm, Heavy Weight: 256gsm

Single Tray Module A3, A4, A5, 140 x 182mm – 320 x 457mm

Light Weight: 60gsm, Heavy Weight: 256gsm

3 Tray Module A3, A4, A5, 140 x 182mm – 297 x 432mm

Light Weight: 60gsm, Heavy Weight: 256gsm

Bypass Tray SRA3, A3, A4, A5, A6, B4, B5, B6, Letter, Legal 13/14, Postcard, C4 / C5 Envelope, Envelope, 89 x 98mm – 320 x 483mm, Banner size: 320 x 1,200mm

Light Weight: 55gsm, Heavy Weight: 256gsm

Duplex Unit SRA3, A3, A4, A5, B4, B5, Letter, Legal 13/14, C4 / C5 Envelope, 128 x 140mm – 320 x 457mm

Light Weight: 55gsm, Heavy Weight: 169gsm

For more information, please contact:

Fuji Xerox Printers

Fuji Xerox Printers

Innovative A3 Colour Printer with Cutting-Edge Self-Scanning LED Print Technology

capable of 1,200 x 2,400dpi output!





For those who demand exceptional colour reproduction and uncompromising performance, Fuji Xerox has the answer for you – the DocuPrint C2255 Colour Page Printer. It is a scalable colour printer with cutting-edge Self-Scanning LED Print Head technology able to print up to SRA3 and banner size. The DocuPrint C2255 is also networkable for various environments and comes with built-in and optional security features for top-notch confidentiality. And being environmentally responsible, the DocuPrint C2255 is safe and ecologically designed. So go beyond laser and let the DocuPrint C2255 dazzle you with its performance.



Fuji Xerox Self-Scanning LED Print Head Technology

Basically, Self-Scanning LED Print Head technology utilises a print head that creates an image on the print drum using LEDs (Light Emitting Diodes) as the light source. The light from the LEDs are directed through a lens array which forms the image document on the drum. However, the DocuPrint C2255 has five features, combining Advanced Self-Scanning LED Print Head Technology and Superior Imaging Technology, to ensure its high quality 1,200 x 2,400dpi output consistently:

- 1,200dpi Self-Scanning LED chips**
This assures high quality printing with 14,592 emitting points comprising of 256 dots x 57 chips.
- Newly designed lens**
The optically precise lenses produce highly accurate images on the drum.
- Full-featured ASIC Driver**
The small, intelligent ASIC driver assures precise control of the Self-Scanning LED chips.
- Image enhancement processing**
Images are scanned in two directions (rather than one) on a finer matrix than with conventional technology. This produces smoother lines, especially those at slight angles, for razor-sharp text and graphics.

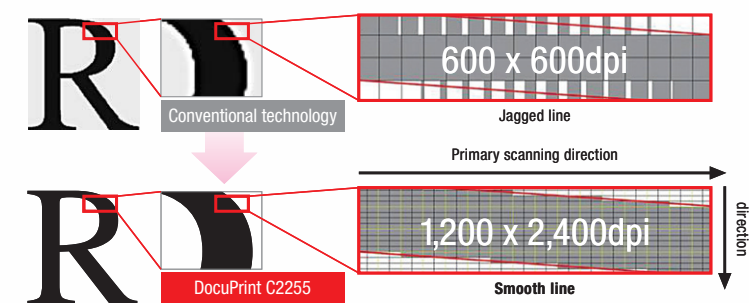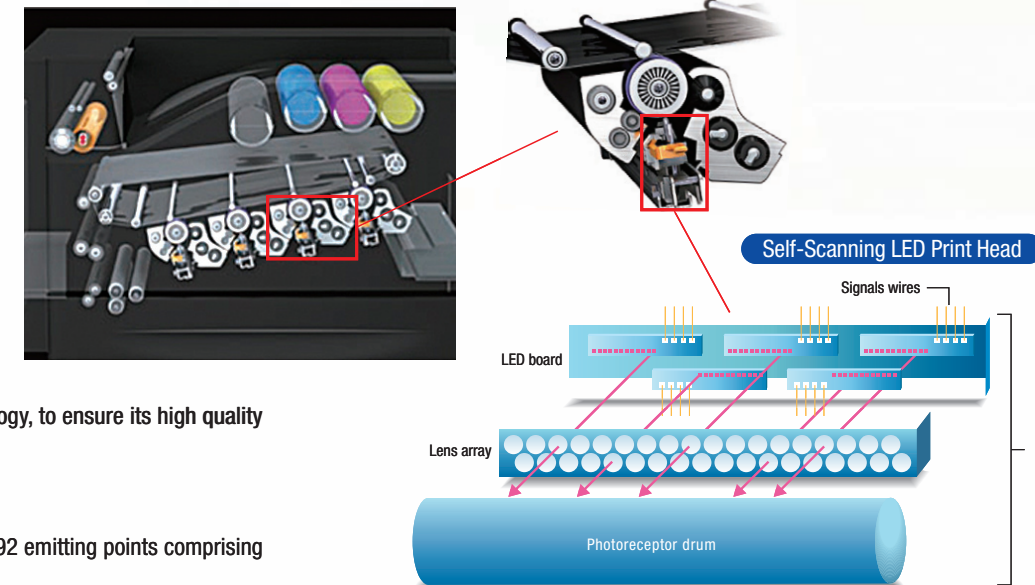

High On Speed

- 25ppm colour and monochrome output
- Fast warm-up time of less than 30 seconds
- Fast colour first-page-out time <8.3 seconds
- 667MHz high-speed CPU
- 256MB RAM expandable to 1.5GB
- Shortened paper path via tandem + intermediate belt enables high-speed printing
- Optional Duplex printing to save time


High On Resolution

- 1,200 x 2,400dpi super high quality printing
- Accurate highlight coverage improves print stability in different environments
- Improved EA-HG Toner produces beautiful and vivid images

Easy-To-Use


- Bright LCD control panel can display in four languages
- Intuitive easy operation
- Front access for easy consumable replacement
- Automatically switches to monochrome when colour toner runs out

- Light-weight paper tray opens easily

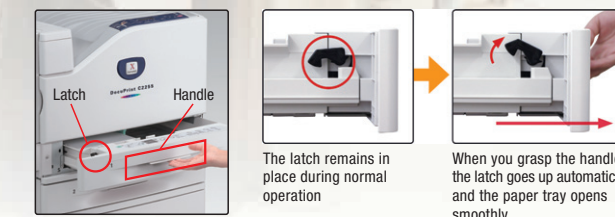

(v) MACS (Micro Accurate Control Screen) digital screening

It uses Fuji Xerox HQ digital screen technology (normally found only in high-end printers) which controls pixel production based on image density. This results in smooth gradation and excellent highlight reproduction.

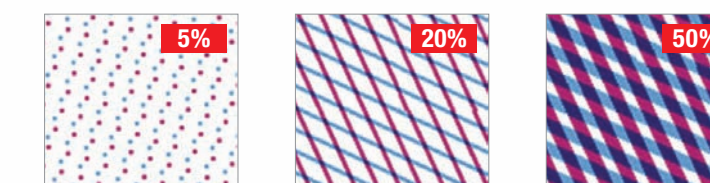

The screen patterns shown on above photos are simulations only

In addition, other benefits of the DocuPrint C2255 over conventional printers are that there are fewer moving parts for better efficiency. It's compact with shorter optical path and smaller light emitting unit. It's also silent, more reliable and offer lower power consumption.

Cutting Edge Security

The DocuPrint C2255 ensures that your confidential documents remain confidential. Its built-in and optional security features mean you can always print with total peace of mind. These include:

- IPv6+IPSec, IEEE802.1X authentication* and SNMPv3 compatible for TCP / IP
- IPP+SSL security print
- Hard disk overwrite†
- Print user control
- Control panel lock
- Hidden Universally Unique Identifier (UUID) mark to detect copied documents†
- Secure Watermark to protect hard copy†

* Require optional HDD

† Require optional Feature Enhance Kit and HDD

Out-of-Box Capability for Enterprise Applications

SAP® R / 3®

- Customisable ApeosWare device type for duplex printing and input / output trays*1
- PostScript and PCL barcode printing
- Unicode printing*2
- Citrix printing via Print Utility for Citrix XenApp*1
- Access all printer features (i.e. duplex printing, N-Up, tray select, etc.)

Citrix® Presentation Server™

*1 Available via download from the FXAP web site (<http://www.fxap.com.sg>)

*2 Requires the Multi-Language Font Kit (EC101145) and optional hard disk

